

830nm single mode diode laser

SM830-350-TO56-R0x



Oclaro's SM830-350-TO56-R0x is a high efficiency, high power reliable single mode laser diode in TO-56 package with emission wavelength around 830nm and 350mW output power.

The product belongs to a product line named SM830-xxx-TO addressing applications such as 3D sensing, printing, range finding.

The lasers are single transverse mode within the operating condition outlined in the datasheet. This allows the combination with optical elements such as diffractive optical elements (DOE).

The diodes exhibit high power conversion efficiency across a wide temperature range enabling longer battery life when operated in mobile applications. The lasers are fabricated with the well-established recipes used at Oclaro to fabricate extreme high reliability telecommunication products. Hence, the SM830-xxx-TO series provides a powerful, low power consumption and dependable light source for your demanding systems. The diodes are packaged in TO packages to enable easy handling and drop-in replacement in various setups.

Features:

- High output power: 350 mW
- High Efficiency: 1 W/A
- Lateral Single Mode
- Wavelength: $824 \pm 6\text{nm}$
- High Reliability

Applications:

- Motion Sensor
- Gesture Recognition
- Illumination
- Printing

Electro-Optical Characteristics


All parameters are at 25°C case temperature, measured in CW unless otherwise noted

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Central wavelength	λ_0	818	824	830	nm	350mW
Optical power	P_0			350	mW	Up to 60°C
Kink free Power	P_{kink}	380			mW	
Threshold current	I_{th}		55	70	mA	
FWHM beam divergence – parallel	$\theta_{//}$	5.5		8.5	° FWHM	350mW
FWHM beam divergence – perpendicular	θ_{\perp}	16		21	° FWHM	350mW
Spectral Bandwidth (90% power)	$\Delta\lambda_{90}$			0.5	nm	
Wavelength shift with temperature	$d\lambda/dT$		0.25		nm/°C	
Operating current	I_{op}		390	420	mA	350mW
Operating voltage	V_{op}		2.1	2.2	V	350mW
Power Conversion efficiency	PCE	35	40		%	350mW
LD facet location accuracy	BC	-80	0	80	μm	X, Y, Z (ref to header)
Off axis beam tilt	BP	0	0	2	°	parallel and perpendicular


Absolute Maximum Ratings

Parameter	Min	Typ	Max	Unit	Conditions
Operating temperature	0		60	°C	
Storage/transportation temperature	-40		85	°C	
Lead soldering temperature			260	°C	10s


Typical E/O characteristics (CW measurements)

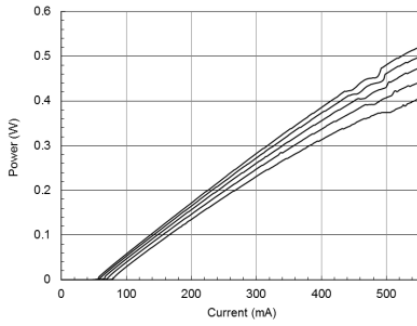


Power versus current from 20 to 60°C (10°C step)

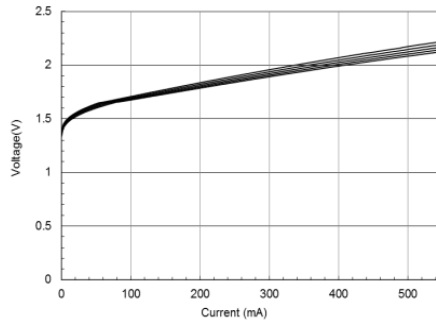


Voltage versus current from 20 to 60°C (10°C step)

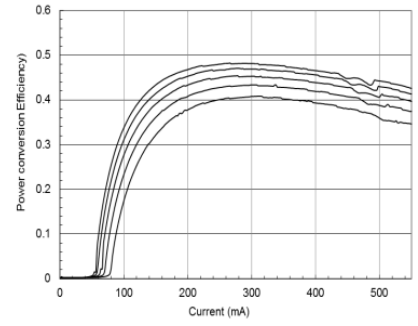


PCE versus current from 20 to 60°C (10°C step)

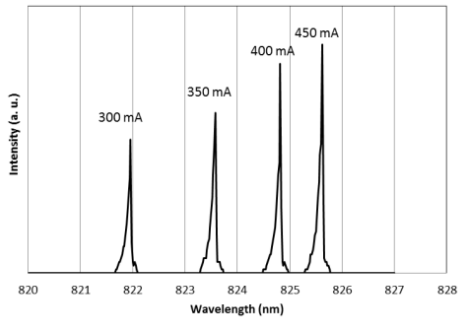


Spectra versus current at 25°C

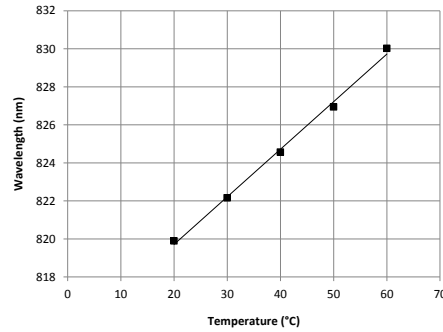


Wavelength versus temperature at constant current 400mA (nm)

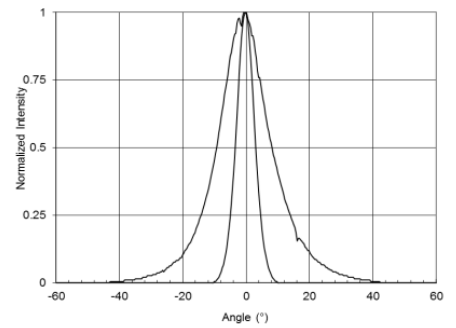


Vertical and lateral far fields at 400mA, 25°C

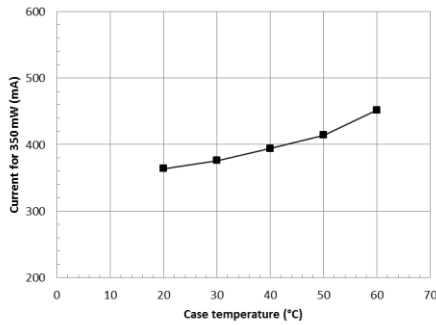

Current to maintain 350mW (mA)

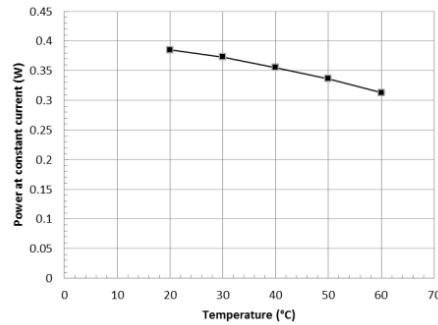


Power at constant current 400mA (W)

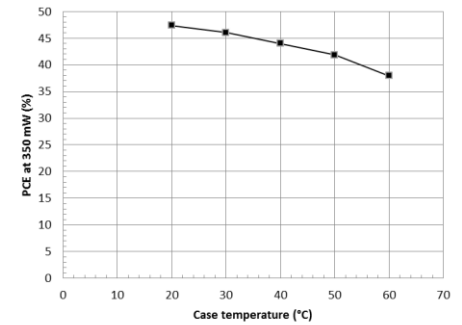

PCE at constant power 350mW (%)

Dimensions (in mm)

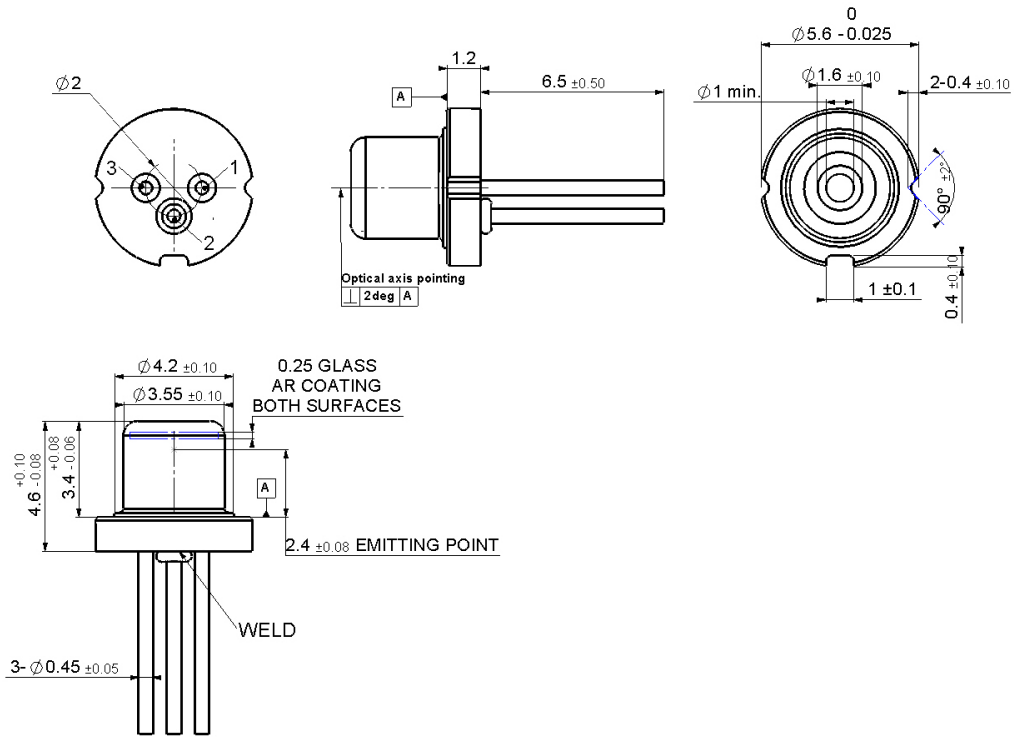

Pin-out

Pin-out 1	Pin-out 2	Pin-out 3(*)
<p>Pin 1: Laser cathode Pin 2: Laser anode, case ground Pin 3: not connected</p>	<p>Pin 1: Laser cathode Pin 2: case ground Pin 3: Laser anode</p>	<p>Pin 1: Laser cathode Pin 2: Laser anode, PD anode, case ground Pin 3: Photodiode</p>

(*) Electro-Optical parameters related to the PD will be provided upon request

RoHS Compliance



Oclaro is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information:

SM830-350-TO56-R01: for pin-out 1 option (see above)

SM830-350-TO56-R02: for pin-out 2 option (see above)

SM830-350-TO56-R03: for pin-out 3 option (see above)

Contact Information

www.oclaro.com

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Oclaro before they become applicable to any particular order or contract. In accordance with the Oclaro policy of continuous improvement specifications may change without notice. Further details are available from any Oclaro sales representative.

D00502-PB Issue 01 May 2013

©Oclaro 2013. Oclaro the Oclaro, Inc. logo, and all other Oclaro, Inc. product names and slogans are trademarks or registered trademarks of Oclaro, Inc. in the U.S.A. or other countries. Products described in this datasheet may be covered by one or more patents in the U.S.A. and abroad. Information in this datasheet is subject to change without notice.



THIS PRODUCT COMPLIES WITH 21CFR 1040.10



REFERENCE IEC 60825-1 Edition 2.0



Caution - use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.